

M230EMS1LED2865-W

NEPTUNE (DOB) bulkhead luminaire with microwave-motion sensor, 30-cm Dia., 6500K, LED2, 1350 Lumens, 16W, White



About Product

NEPTUNE bulkhead luminaire is designed and manufactured by Megalite for mounting on ceilings in offices, residential, and commercial buildings. Aesthetically beautiful design, uniform light distribution, and high ingress protection (IP65) are among the highlights of this luminaire.



Technical Information

Luminaire Name:	NEPTUNE
Catalog Code/product code:	M230EMS1LED2865-W
Mounting Type:	Surface Mounted
Application:	Parking, Office, Hospitality
Application consideration:	suitable for Indoor/Covered Outdoor
Light source type:	DOB LED (PF> 0.5)
Module/ Lamp quantity:	1
CCT (Color temperature):	6500K - Daylight
Light source:	LED
LED Module brand name:	Edison
Lumen maintenance:	> 60000 hours
Lumen maintenance factor:	L70
CRI (Color rendering index):	> 80
Power Consumption:	16
Luminous Flux:	1350
Efficacy (lm/W):	84
IP (Ingress Protection):	IP65
Insulation Class:	Class II
FLICKER:	Flicker Free
Mains voltage:	220~240 VAC


M230EMS1LED2865-W
NEPTUNE (DOB) bulkhead luminaire with microwave-motion sensor, 30-cm Dia., 6500K, LED2, 1350 Lumens, 16W, White

Voltage Frequency:	50 Hz
Wire / Cable Spec:	PVC solid wire
Wire cross section:	0.5
Terminal material:	Polycarbonate
Terminal Spec:	Tool free wire connection, 2 pole (Size: 2.5), Cable looping is possible
Cable Looping:	Yes
Body Material:	Polycarbonate
Diffuser/Glass Material:	Polycarbonate
Diffuser/Glass Shape:	Satin white
Light Distribution:	Uniform light distribution
Gasket Material:	silicon
Packaging type:	Nylon cover and carton
Other Characteristics:	Microwave-Motion sensor
Weight(Kg):	0.6
Dimensions(mm):	Ø300x70
Luminaire mechanical impact resistance:	-
Sensor type:	Microwave-Motion sensor

M230EMS1LED2865-W

NEPTUNE (DOB) bulkhead luminaire with microwave-motion sensor, 30-cm Dia., 6500K, LED2, 1350 Lumens, 16W, White

Photometric Graph

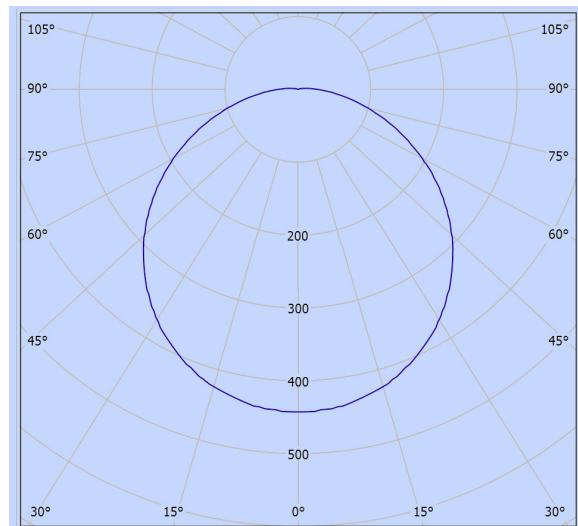

Glare Evaluation According to UGR

		70	70	50	50	30	70	70	50	50	30
p Ceiling		50	30	50	30	30	50	30	50	30	30
p Walls		20	20	20	20	20	20	20	20	20	20
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	15.8	17.2	16.1	17.4	17.7	15.8	17.2	16.1	17.4	17.7
	3H	17.1	18.3	17.4	18.6	18.9	17.1	18.3	17.4	18.6	18.9
	4H	17.5	18.7	17.9	19.0	19.3	17.5	18.7	17.9	19.0	19.3
	6H	17.9	19.0	18.3	19.3	19.6	17.9	19.0	18.3	19.3	19.6
	8H	18.0	19.0	18.4	19.4	19.7	18.0	19.0	18.4	19.4	19.7
	12H	18.1	19.1	18.5	19.4	19.8	18.1	19.1	18.5	19.4	19.8
4H	2H	16.4	17.5	16.7	17.8	18.2	16.4	17.5	16.7	17.8	18.2
	3H	17.8	18.8	18.2	19.2	19.5	17.8	18.8	18.2	19.2	19.5
	4H	18.4	19.3	18.8	19.7	20.1	18.4	19.3	18.8	19.7	20.1
	6H	18.9	19.7	19.3	20.1	20.5	18.9	19.7	19.3	20.1	20.5
	8H	19.0	19.8	19.5	20.2	20.6	19.0	19.8	19.5	20.2	20.6
	12H	19.2	19.8	19.6	20.3	20.7	19.2	19.8	19.6	20.3	20.7
8H	4H	18.6	19.4	19.1	19.8	20.2	18.6	19.4	19.1	19.8	20.2
	6H	19.2	19.8	19.7	20.3	20.8	19.2	19.8	19.7	20.3	20.8
	8H	19.5	20.0	20.0	20.5	21.0	19.5	20.0	20.0	20.5	21.0
	12H	19.7	20.1	20.2	20.6	21.2	19.7	20.1	20.2	20.6	21.2
	4H	18.7	19.3	19.1	19.7	20.2	18.7	19.3	19.1	19.7	20.2
	6H	19.3	19.8	19.8	20.3	20.8	19.3	19.8	19.8	20.3	20.8
12H	19.6	20.0	20.1	20.5	21.1	19.6	20.0	20.1	20.5	21.1	
Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2				
S = 1.5H		+0.3 / -0.5					+0.3 / -0.5				
S = 2.0H		+0.5 / -0.9					+0.5 / -0.9				
Standard table		BK05					BK05				
Correction		2.2					2.2				
Summand											
Corrected Glare Indices referring to 1350lm Total Luminous Flux											

Dimensional Drawing

